




## Brake Controller 2 and 4 wheel 12 volt unit CM710

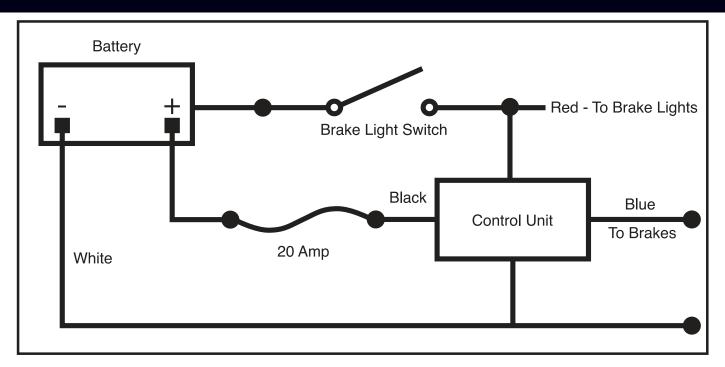

## WIRING CONFIGURATION

White Wire Earth negative
Blue Wire To trailer brakes

Red Wire To normally open contact on brake light switch
Black Wire To positive side of battery through a 20 amp fuse

## **WARNING:**

Incorrect wiring will cause the diode to instantly Open Circuit, voiding Warranty.

## INSTALLATION INSTRUCTIONS

- 1. Connect white wire to earth.
- 2. Extend blue wire to electric brake magnets
- 3. Run red wire to normally open contact on brake light switch
- 4. Run a black 4mm wire from the positive side of the battery through a 20 amp fuse to the black wire of the control unit
- 5. Mount the bracket keeping the control unit a minimum of 5mm from other surfaces
- 6. When testing the unit, it must be under a resistive load to vary the voltage NOTE: LED is activated only when brake is operated.

**COUPLEMATE HELP LINE: 07 3348 3822**